



REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
	2016.04.13	A	INITIAL RELELASE.	DICK
	2016.04.27	A1	NO CHANGE	DICK

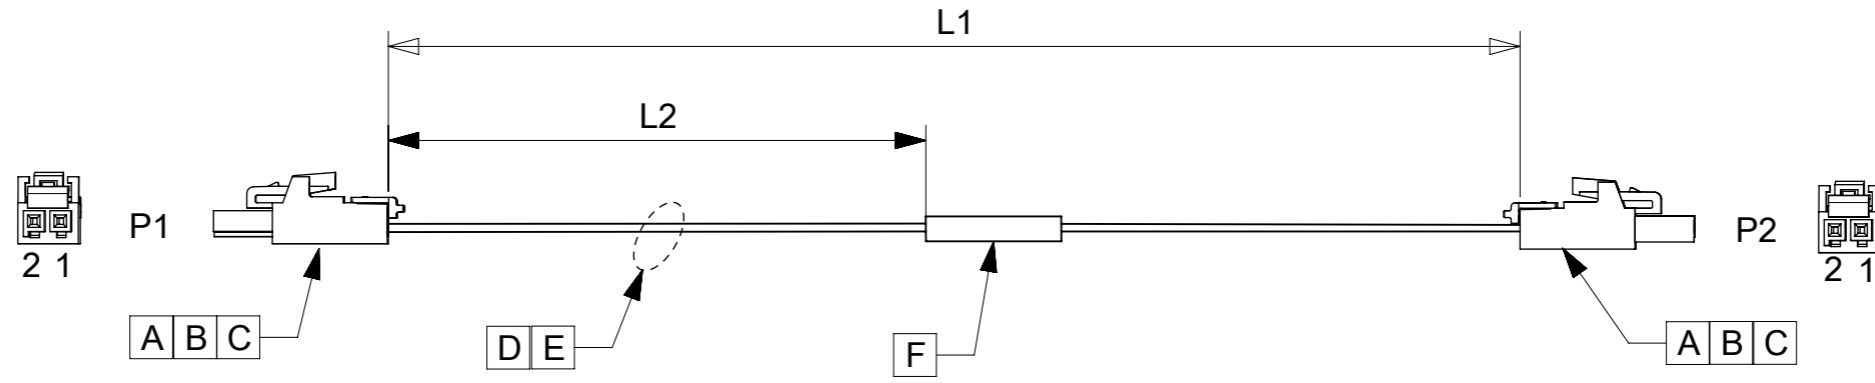

SEE DETAIL A

TABLE			
PART NUMBER	L1	L2	TITLE
451340201	150±10	65±8	Ultrafit 2 Circuit White 150MM
451340203	300±10	140±10	Ultrafit 2 Circuit White 300MM
451340210	1000±15	490±10	Ultrafit 2 Circuit White 1M

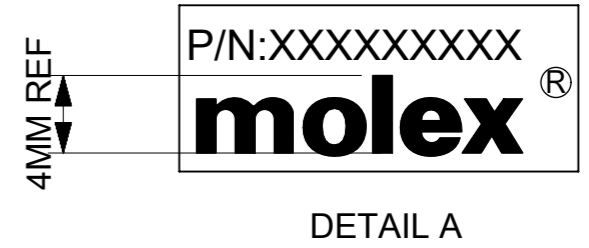

- NOTES**
- THIS PRODUCT MUST MEET 2011/65/EU ROHS COMPLIANCE.
此产品需符合 2011/65/EU ROHS环保要求。
 - ELECTRICAL PERFORMANCE REFER TO ES-000.
电气特性参考ES-000.
 - LABEL TEXT MUST BE 2mm Min. IN HEIGHT WITH ARIAL FONT.
标签字高最小2mm,字体ARIAL.
 - CONNECTORS REFER TO PS-172323-0001 & AS-172323-0001;
连接器应用参考PS-172323-0001 & AS-172323-0001;
 - STICK UL LABEL ON THE OUTSIDE CARTON.
外箱上贴UL标签.

WIRING CHART		
P1	P2	COLOR
1	2	BLACK
2	1	RED

F	Blank label 25.4x36.5mm (WHT:12.7mm)		1
E	16AWG;Plated;SR-PVC;RED;OD1.95mm;UL1061		A/R
D	16AWG;Plated;SR-PVC;BLK;OD1.95mm;UL1061		A/R
C	ULTRA-FIT CRIMP TERM 16-18AWG TIN		4
B	ULTRA-FIT TPA V0 BLK 02 CKT		2
A	ULTRA-FIT RCPT HSG SGL V0 NAT TPA 02 CKT		2
ITEM	DESCRIPTION	L(MM)	Q'TY

QUALITY SYMBOLS ▽A = 0 ▽E = 0 ▽F = 0 ▽ = 0 ▽C = 0 ⊗ = 0 ■ = 0 ▽ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				mm NTS DRWN BY: WLXIE DATE: 2016/03/01			
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± °		CHK'D BY: DHUANG16 DATE: 2016/03/28					
	4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±		APPR BY: YXZOU DATE: 2016/04/19		PRODUCT CUSTOMER DRAWING			
	EC NO: 104565 DRWN: WLXIE CHK'D: YXZOU APPR: YXZOU		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING SIZE: A3 THIRD ANGLE PROJECTION		SERIES: 201234	MATERIAL NUMBER: SEE TABLE
A1 REV				DOCUMENT NUMBER: 2012341006 DOC TYPE: PSD DOC PART: 000 SHEET NUMBER: 1 OF 1				