


T340A225K020AT7301

Aliases (T340A225K020ATTR)

T340, Tantalum, MnO₂ Tantalum, Commercial Grade, 2.2 uF, 10%, 20 VDC, 8 Ohms, Lead Spacing = 2.5mm

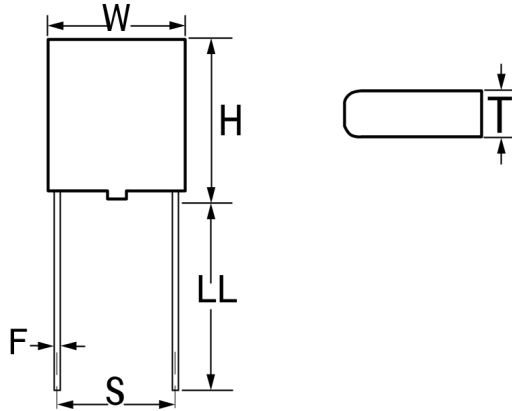

Click [here](#) for the 3D model.

Dimensions

W	4.7mm MAX
H	7.3mm MAX
T	4.2mm MAX
S	2.5mm +/-0.5mm
LL	15mm +/-2mm
F	0.5mm +/-0.03mm

Packaging Specifications

Packaging	T&R, 305mm
Packaging Quantity	1000

General Information

Series	T340
Dielectric	MnO ₂ Tantalum
Style	Radial Molded
Description	Radial, Solid Tantalum, Molded
RoHS	Yes
Termination	Tin
AEC-Q200	No
Construction	Molded
Miscellaneous	Includes Standoff Height of 0.38 +/- 0.13mm.
Notes	Longest Lead Is Positive.

Specifications

Capacitance	2.2 uF
Capacitance Tolerance	10%
Voltage DC	20 VDC (85C), 13 VDC (125C), 0.2 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	6%
Resistance	8 Ohms (100kHz)
Leakage Current	1 uA