


5	6	7	8
REV. B	ECN NO. LEN1590420~23	DATE 2015/09/11	SIGN Ruru
			DESCRIPTION Change Logo & Note


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

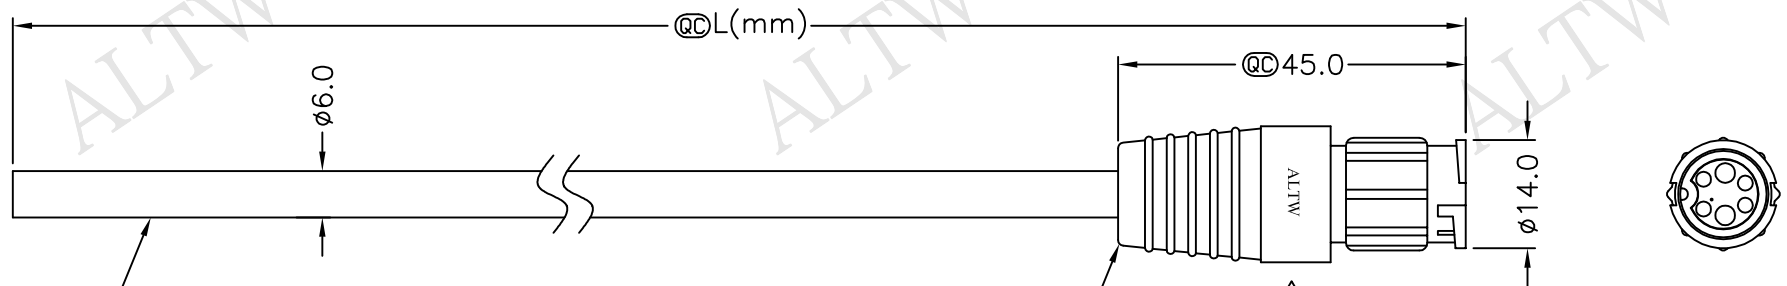

Cable ②

BBD-06BMFM-LL7000 ①  
Color: Black


Conn.



BBD-06BMFM-LL7AXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ⋮
- 99:99Meters

Cable Length(L):01~99Meters



Pin Assignments  
Front View

Gray	(24AWG)	6
Blue	(20AWG)	5
Yellow	(24AWG)	4
Green	(24AWG)	3
Brown	(20AWG)	2
White	(24AWG)	1
Wire Color		Conn.1
Pin Out		

Note:

- \* @C Important Dimension To Check.
- \* Waterproof Rate: IP67
- \* Housing: Nylon+GF, Black
- \* Female Pin: Copper Alloy, Gold Plated
- \* Cable: UL2464 24AWG\*4C+20AWG\*2C+D +Al/My,(UV Resistant) OD=6.0, Black
- △ \* Cable Length Tolerance: 01M: ±40mm  
02M~05M: ±60mm  
06M~10M: ±100mm  
11M~30M: ±200mm  
31M~99M: ±500mm

UNIT:mm	TITLE Standard Cable Lock 6Pin M Conn. F Pin		<b>Amphenol LTW</b> 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ruru	DATE 2015/09/11
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1		DWG NO BBD-06BMFM-LL7AXX	CHECKED BY Rita	DATE 2015/09/11
REV. B	SIZE A4	QC :Inspection Item	CUSTOMER ALTW	APPROVED BY Lion	DATE 2015/09/11	