

- Durable And Reusable Design
- Works Well In Both Film And Video Shoots
- Patent Pending
- Covers Wires And Set Pieces
- Cut And Abrasion Resistant


Put-Ups

Nominal Size	Part #	Wall Thickness	Hook & Loop	Standard Spool Put-Ups	Available Colors	Lbs/ 10'
				Spool Length		
2"	SKN2.00BG	.048"	1"	10'	Blue/Green BG	2.25
2 1/2"	SKN2.50BG	.048"	1"	10'	Blue/Green BG	2.80


*Contact your Account Representative for additional sizes.

Keyable Sleeve For Special Effects Professionals

Blue/green screen was originally invented as a film technique to separate the actors and composite them over another background. The reason both green and blue are used because they are the least prominent colors in our skin tone. The goal in using a green or a blue screen is to isolate the subject. Following the same concept, Techflex engineers have designed STUDIO KEY WRAP (SK), a reversible, bright blue/green sleeving, which is perfect cover-up for wires on your set. During film editing, you can easily key-out the green and blue colors, so you will be left with just your subject without any background or wires hanging around and set pieces. Studio Key Wrap is made of durable, two sided vinyl, with blue on one side and green on other, and it has hook and loop for quick and easy installation. Our sleeving is thick enough not to let the light pass through it, and also protects your cables against unwanted moisture.

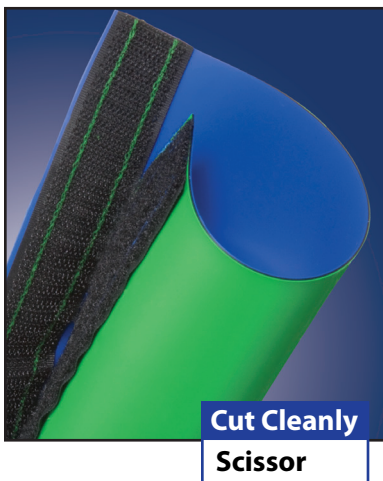

Material	Vinyl
Grade	SKN
Wall Thickness	.048"

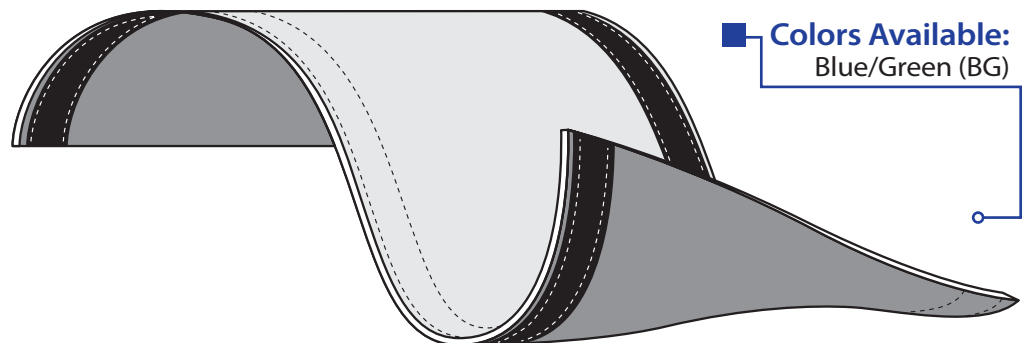



ABRASION

Abrasion Resistance
Low

Material Destroyed
362 Test Cycles

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

CHEMICAL RESISTANCE

1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water <i>0-S-1926</i> _____	1
Hydraulic Fluid <i>MIL-H-5606</i> _____	1
Lube Oil <i>MIL-L-7808</i> _____	1
De-Icing Fluid <i>MIL-A-8243</i> _____	1
Strong Acids _____	4
Strong Oxidants _____	4
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	2
Fungus <i>ASTM G-21</i> _____	1

PHYSICAL PROPERTIES

Recommended Cutting _____	Scissor
Colors _____	1 Reversible
Wall Thickness _____	.048
Specific Gravity <i>ASTM D-792</i> _____	NA
Moisture Absorption _____	NA
% <i>ASTM D-570</i>	