

ITEM	PART#	DESCRIPTION	QTY	UOM
A	436450400	MicroFit 3.0 Receptacle Sgl Row 4Ckt	1	PC
B	430300038	MicroFit 3.0 F Crp Term Chn Tin 18	4	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X18AWG DISC SR-PVC BK UL10002	BLACK
A2	--	1X18AWG DISC SR-PVC BK UL10002	BLACK
A3	--	1X18AWG DISC SR-PVC BK UL10002	BLACK
A4	--	1X18AWG DISC SR-PVC BK UL10002	BLACK

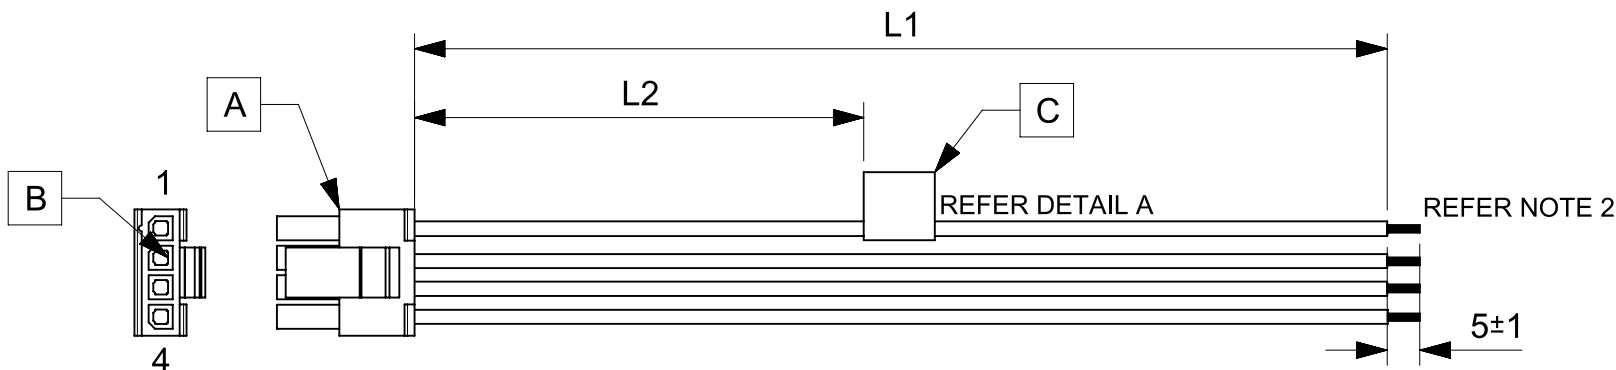


TABLE			
PART NUMBER	L1	L2	TITLE
2147511041	150±8	63 REF	MICROFIT 3.0 SR R-S 4CKT 150 MM Sn
2147511042	300±10	138 REF	MICROFIT 3.0 SR R-S 4CKT 300 MM Sn
2147511043	600±10	288 REF	MICROFIT 3.0 SR R-S 4CKT 600 MM Sn

**NOTES**

1. Connector view shown is from mating side.
2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.55mm Max.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/02/29	A	INITIAL RELEASE	ARAJU

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC:			
∇ = 0		mm		NTS					
∇ = 0		GENERAL TOLERANCES (UNLESS SPECIFIED)							
∇ = 0		ANGULAR TOL ± °							
S = 0		4 PLACES	±	EC NO: 637489					
▼ = 0		3 PLACES	±	DRWN: ARAJU		2020/02/29			
∇ = 0		2 PLACES	±	CHK'D: RDESAI01		2020/05/14			
∇ = 0		1 PLACE	±	APPR: RDESAI01		2020/05/14			
∇ = 0		0 PLACES	±	INITIAL REVISION:					
∇ = 0		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES	
∇ = 0				A4-SIZE		214751		MATERIAL NUMBER	
				SEE TABLE		GENERAL MARKET		SHEET NUMBER	

<b>molex</b>		
SEE TABLE		
PRODUCT CUSTOMER DRAWING		
DOCUMENT NUMBER	DOC TYPE	DOC PART
2147511041	PSD	000
REVISION	A	

RELEASE STATUS	P1	RELEASE DATE	2020/05/14	03:37:03
----------------	----	--------------	------------	----------