

Ratings

Voltage: 600 V
 Temperature: -40~105 °C
 Flammability: VW-1

Conductor

Conductor count: 1
 Gauge: 16 AWG 1.31 mm²
 Material: tinned copper strands
 Strand size: Ø 0.16 mm x 65
 Resistance at 20 °C: 15 Ω /km max

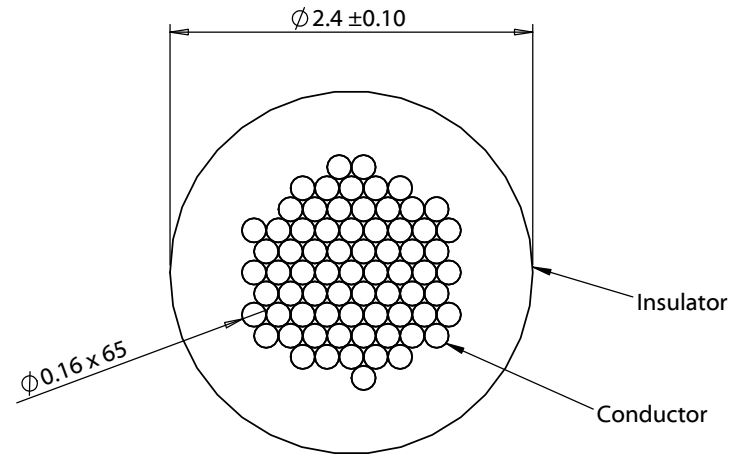
Insulator



Material: Polyphenylene Ether, Modified (mPPE)
 Color: gray
 Diameter: Ø 2.4 ±0.10 mm
 Nominal thickness: 0.43 mm
 Resistance at 20 °C: 100 MΩ /km min

Wire marking: E339579 UL AWM STYLE 11028 16 AWG 105°C
 600V VW-1 --- cUL AWM I A/B 105°C 600V FT1 TENSILITY

Bend radius

Minimum: 4 times diameter (9.6 mm)



Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Phthalate and halogen free	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	2/23/2021	Initial release	Verified:		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size: Part number:
				Wire, hook-up, TS, 16 AWG, UL 11028, 600V, 105C, 2.4 mm, mPPE, gray	A 30-01730
				Scale: 20:1	 

5

4

3

2

1