

Type APR-I Automotive Blade Fuse Standard – LED Indicating



www.optifuse.com (619) 593-5050


Specifications:

- Voltage: 32VDC
- Amperage: 2A, 3A, 4A, 5A, 7.5A, 10A, 12A, 15A, 20A, 25A, 30A, 35A, 40A
- Body: PC
- Indicating LED when fuse is opened
- Terminals: Zinc alloy
- Designed to meet SAE and ISO 8820 Standards.
(Except APR-I-12A, a New Amperage)
- Interrupt Rating – 1000A @ 32 VDC


Part Number	Amperage	Body Color
APR-I-2A	2A	Gray
APR-I-3A	3A	Violet
APR-I-4A	4A	Pink
APR-I-5A	5A	Tan
APR-I-7.5A	7.5A	Brown
APR-I-10A	10A	Red
APR-I-15A	15A	Blue
APR-I-20A	20A	Yellow
APR-I-25A	25A	Clear
APR-I-30A	30A	Green
APR-I-35A	35A	Blue Green
APR-I-40A	40A	Orange

Time Characteristics:		
% of Rated Current	Min Hold Time	Max Hold Time
110%	100h	~
135%	~	1800s
150%	~	1800s
200%	~	5s

Time Current Curve

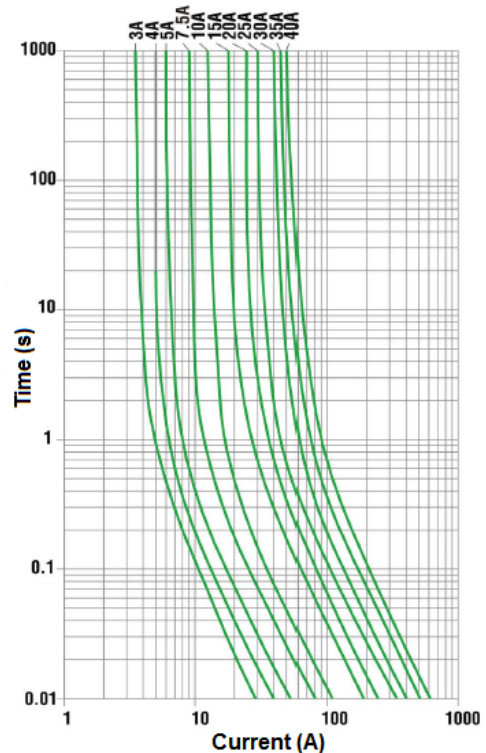

Mechanical Dimensions: Inches [mm]

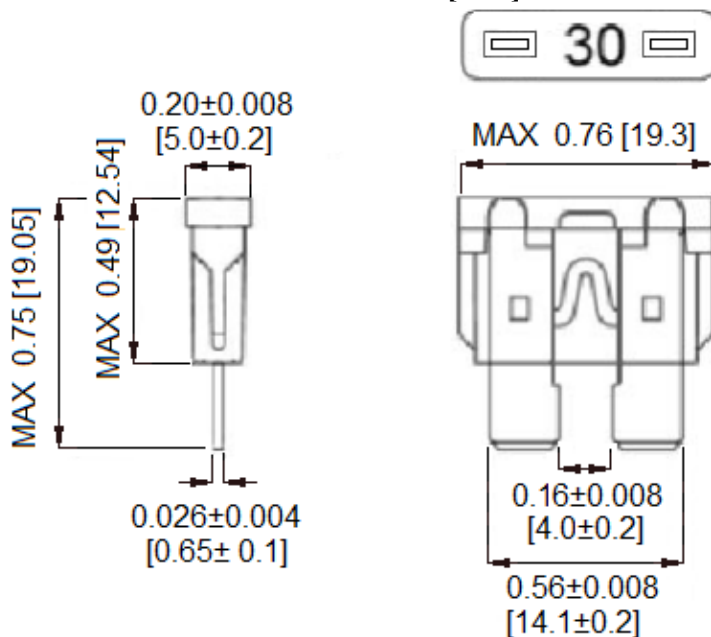

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

