

# SPECIFICATION CONTROL DRAWING


**55PC1234**

TITLE  
THREE CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLT

Date  
1-15-93

Revision

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

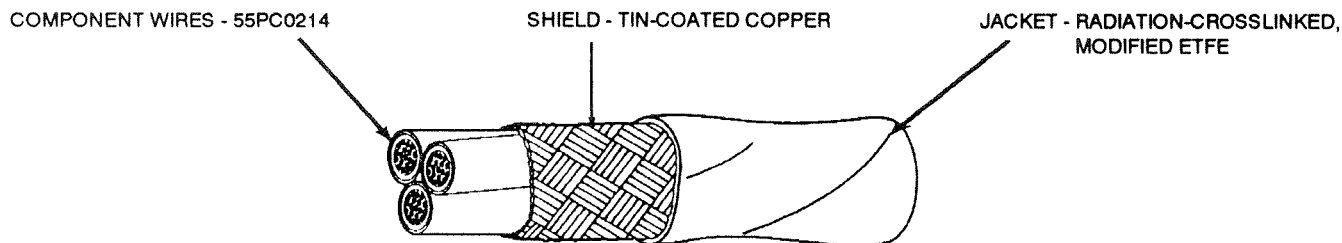

CONSTRUCTION DETAILS									
PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC1234-26-*	26	38	.0055	.0070	.102	.107	.112	9.89	10.39
55PC1234-24-*	24	38	.0055	.0070	.113	.118	.123	12.42	12.93
55PC1234-22-*	22	38	.0055	.0070	.126	.131	.136	16.05	16.62
55PC1234-20-*	20	38	.0055	.0070	.144	.149	.154	21.74	22.41
55PC1234-18-*	18	38	.0055	.0070	.166	.171	.176	29.93	30.81
55PC1234-16-*	16	38	.0055	.0070	.182	.187	.192	36.40	37.38

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms)  
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz  
 CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour  
 JACKET COLOR: White preferred  
 JACKET ELONGATION AND TENSILE STRENGTH:  
 Elongation, 50% (minimum)  
 Tensile Strength, 5000 lbf/in<sup>2</sup> (minimum)  
 JACKET FLAWS:  
 Spark Test, 1000 volts (rms), 60 Hz, 100% test  
 Impulse Dielectric Test, 6.0 kV (peak), 100 % test

SHIELD COVERAGE: 85% (minimum)  
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):  
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:  
 The \*\*\* in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.  
 Example: AWG 22, red, blue and yellow component wires;  
 white jacket: 55PC1234-22-2/6/4-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881.