

ITEM	PART#	DESCRIPTION	QTY	UOM
A	39012065	NEW MINI FIT CONN HOUSING 555706R210	1	PC
B	39000089	MiniFit Term Crp Fem Chn Bs 30Au 16awg	6	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A4	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A5	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A6	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

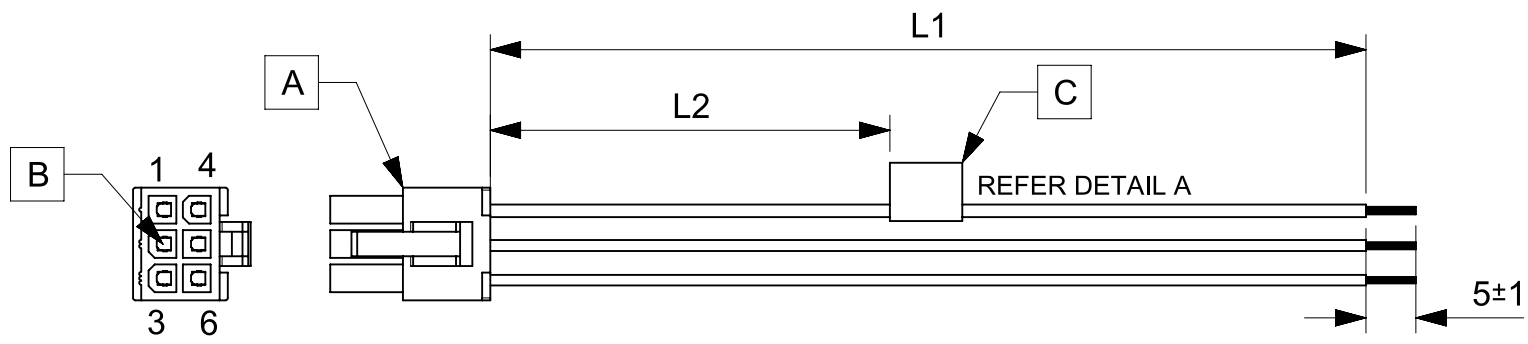


TABLE			
PART NUMBER	L1	L2	TITLE
2153262061	150±8	63 REF	MINIFIT JR DR R-S 6 CIRCUIT 150MM Au
2153262062	300±10	138 REF	MINIFIT JR DR R-S 6 CIRCUIT 300MM Au
2153262063	600±10	288 REF	MINIFIT JR DR R-S 6 CIRCUIT 600MM Au

- NOTES**
1. Connector view shown is from mating side.
 2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/09	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{F}{A} = 0$ $\frac{F}{E} = 0$ $\frac{F}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		
	DIMENSION UNITS	SCALE	GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	NTS	ANGULAR TOL ± °		
	4 PLACES ±		3 PLACES ±		
3 PLACES ±		2 PLACES ±		EC NO: 638379	PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER: 2153262061 DOC TYPE: PSD DOC PART: 000 REVISION: A
2 PLACES ±		1 PLACE ±		DRWN: ARAJU 2020/03/09	
1 PLACE ±		0 PLACES ±		CHK'D: RDESAI01 2020/05/28	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		APPR: RDESAI01 2020/05/28	
DRAWING		SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
A4-SIZE		215326	SEE TABLE	GENERAL MARKET	1 OF 1