

3"W x 2.18"L x 0.93"H

- Universal 90-264VAC Input
- Molex Mini Connector I/O
- Regulated Outputs
- 3000V Isolation
- Single Output from 3.3 to 24 VDC



Model Number	Output Voltage	Output Amps (max)	(pk)
ASL-1500	3.3 VDC	3.5A	3.8A
ASL-1501	5 VDC	3A	3.6A
ASL-1502	12 VDC	1.25A	1.5A
ASL-1503	15VDC	1A	1.25A
ASL-1505	24VDC	0.63A	0.75A

INPUT SPECIFICATIONS

Input Voltage Range	90-264 VAC; (100-240 Nominal)
Frequency Range	47-63 Hz
Inrush Current, typ:	20A @ 100VAC Input * 40A @ 200VAC Input *
Leakage Current	<3.5mA at 264VAC, 50Hz

OUTPUT SPECIFICATIONS

Voltage and Current	See Selection Chart
Load Regulation	+/- 3% (20% to 100% Load)
Line Regulation	+/- 0.1~1%, typ
Preset Accuracy	1%
DC Voltage Adjust (typ)	+/- 6% of FS (Primary)
Temperature Coefficient	+/-0.03%/°C
Ripple/Noise	100mV Pk-Pk, typ
Over Voltage Protection	Clamp, 130-150% *
Short Circuit Protection	Continuous, self-recovering
Hold Up Time	20 mS, typ at Nom.Input Voltage

GENERAL SPECIFICATIONS

Isolation	I/P-O/P:3000VAC
Efficiency	72%~78%, typ (70% for 3.3 Vout)
Switching Frequency	100Khz, (fixed, typical)
Safety UL/cUL:	UL60950-1 2nd ed./ C22.2 60950-1 2nd ed.
CB:	IEC60950-1 2nd ed.


PHYSICAL SPECIFICATIONS

Size	3" x 2.18" x 0.93"
Construction	Open Frame
Weight	2.5oz (70g)
Connectors: Molex P/N:	50-37-5043 (Input) 50-37-5043 (Output) Contact: 08-70-1040

ENVIRONMENTAL SPECIFICATIONS

Oper. Temperature	0 to +50°C(FL) See Derate
Storage Temperature	-25 to +71°C *
Relative Humidity	0 to + 95%, non-cond *
EMI	EN55022 Class A
MTBF	180,000 Hrs Mil Std 217, 25°C


OUTPUT DERATING CURVE

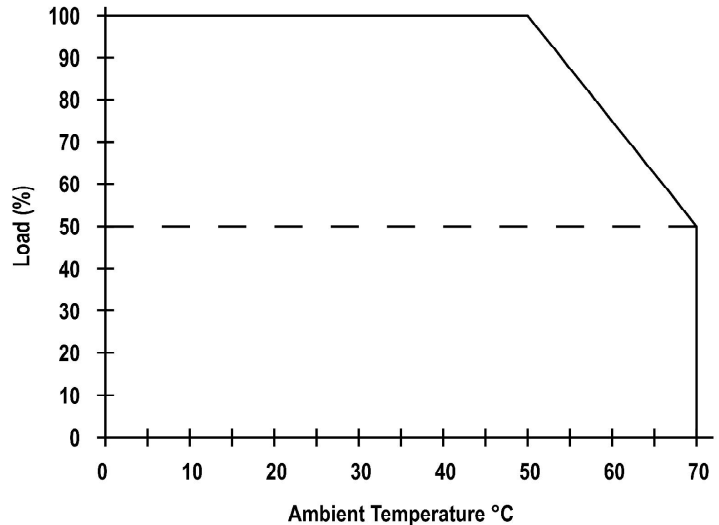

All specifications are typical at nominal input, full load, and 25DegC unless otherwise noted

* These are stress ratings. Exposure of the devices to any of these conditions may adversely affect long term reliability. Proper operation under conditions other than the standard operating conditions is neither warranted nor implied.

MECHANICAL DIMENSIONS

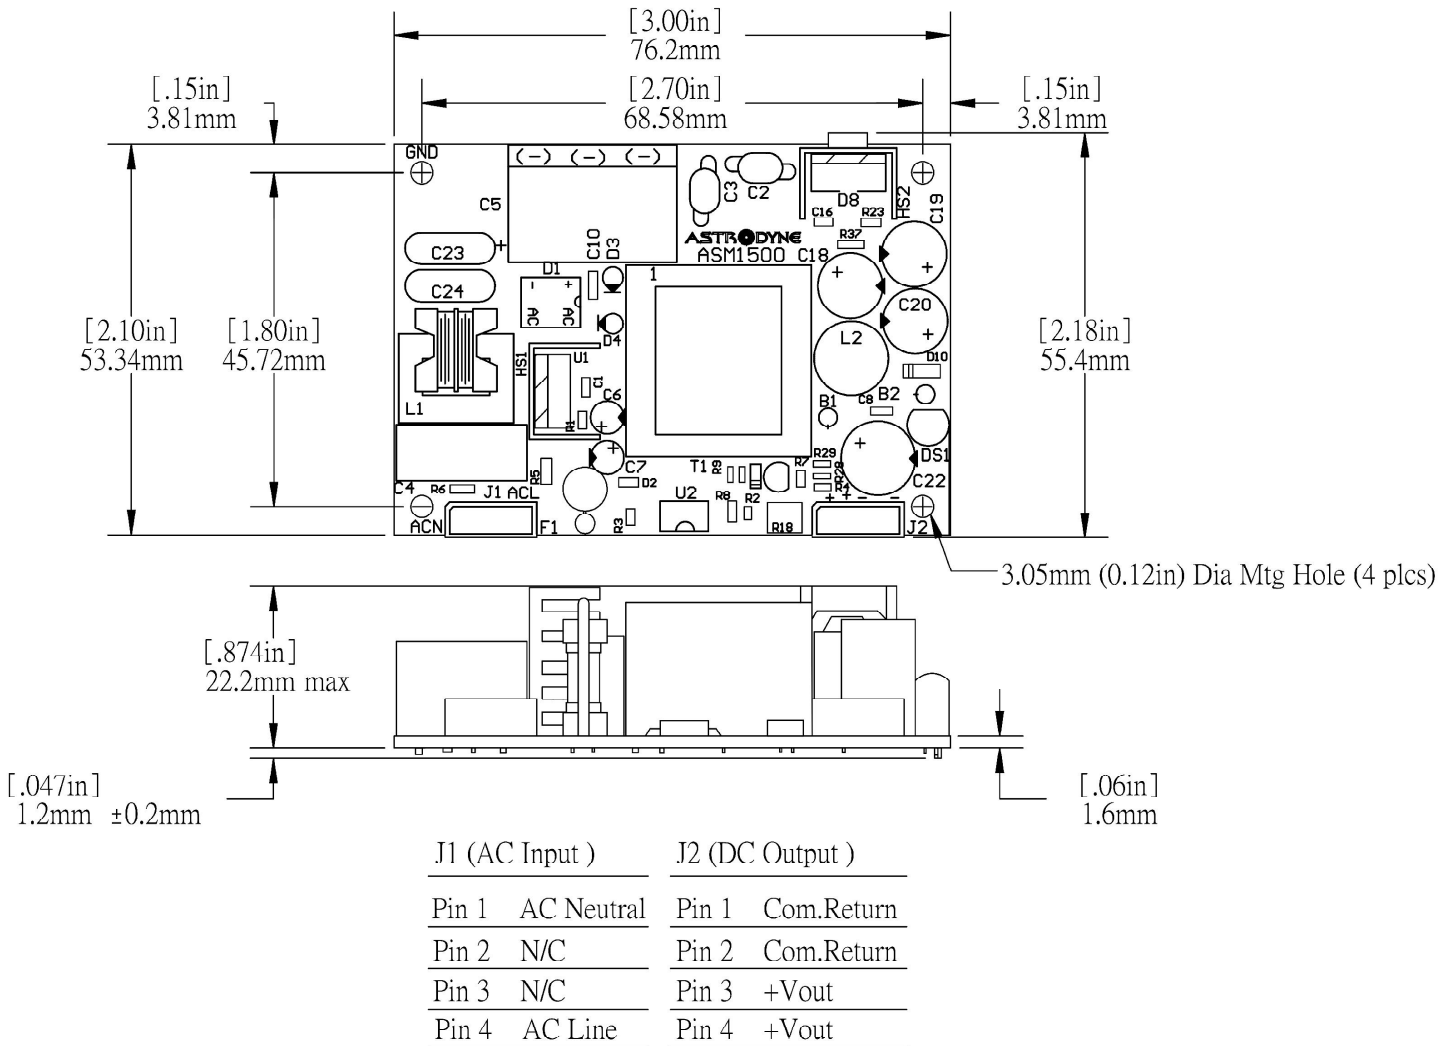

Input connector : Molex 22-43-8040 or equivalent
 Output connector : Molex 22-43-8040 or equivalent
 Length & Width tolerance : ± 0.1mm (0.004in)