


T354A684M035AT7301

Aliases (T354A684M035ATTR)

T354, Tantalum, MnO₂ Tantalum, Commercial Grade, .68 uF, 20%, 35 VDC, Radial, Solid Tantalum, Conformal, Dipped, Lead Spacing = 6.35mm

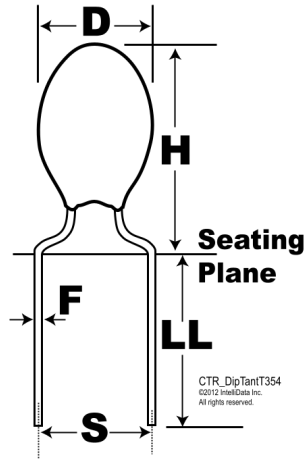

Click [here](#) for the 3D model.

Dimensions

| | |
|----|------------------|
| D | 4.5mm |
| H | 8.6mm |
| S | 6.35mm +/-0.38mm |
| LL | 4.75mm +/-0.81mm |
| F | 0.5mm +/-0.05mm |

Packaging Specifications

| | |
|--------------------|------------|
| Packaging | T&R, 305mm |
| Packaging Quantity | 1500 |

General Information

| | |
|-------------|---|
| Series | T354 |
| Dielectric | MnO ₂ Tantalum |
| Style | Radial |
| Description | Radial, Solid Tantalum, Conformal, Dipped |
| Features | Low Leakage |
| RoHS | Yes |
| Termination | Tin |
| AEC-Q200 | No |
| Notes | Longest Lead Is Positive. |

Specifications

| | |
|-----------------------|--|
| Capacitance | .68 uF |
| Capacitance Tolerance | 20% |
| Voltage DC | 35 VDC (85C), 23 VDC (125C), 0.35 VDC (125C Reverse) |
| Temperature Range | -55/+125°C |
| Dissipation Factor | 3% |
| Leakage Current | 0.5 uA |