


## T350M107K020AT7301

Aliases (T350M107K020ATTR)

Not for New Design

T350, Tantalum, MnO<sub>2</sub> Tantalum, Commercial Grade, 100 uF, 10%, 20 VDC, Radial, Solid Tantalum, Conformal, Dipped, Lead Spacing = 5.08mm

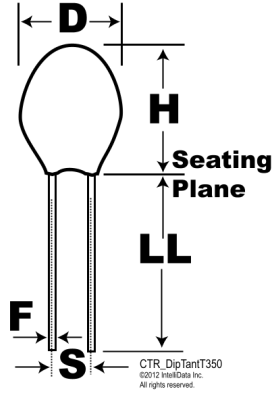

Click [here](#) for the 3D model.

### Dimensions

D	10.2mm
H	17mm
S	5.08mm +/-0.38mm
LL	12.7mm +/-1.26mm
F	0.5mm +/-0.05mm

### Packaging Specifications

Packaging	T&R, 305mm
Packaging Quantity	500

### General Information

Series	T350
Dielectric	MnO <sub>2</sub> Tantalum
Style	Radial
Description	Radial, Solid Tantalum, Conformal, Dipped
Features	Low Leakage
RoHS	Yes
Termination	Tin
AEC-Q200	No
Notes	Longest Lead Is Positive.

### Specifications

Capacitance	100 uF
Capacitance Tolerance	10%
Voltage DC	20 VDC (85C), 13 VDC (125C), 0.2 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	8%
Leakage Current	10 uA