


F612KH684J063C

Obsolete

F612, Film, Metallized Polyester Stacked, General Purpose, 0.68 μ F, 5%, 63 VDC, 85°C, Lead Spacing = 7.5mm

FRONT VIEW

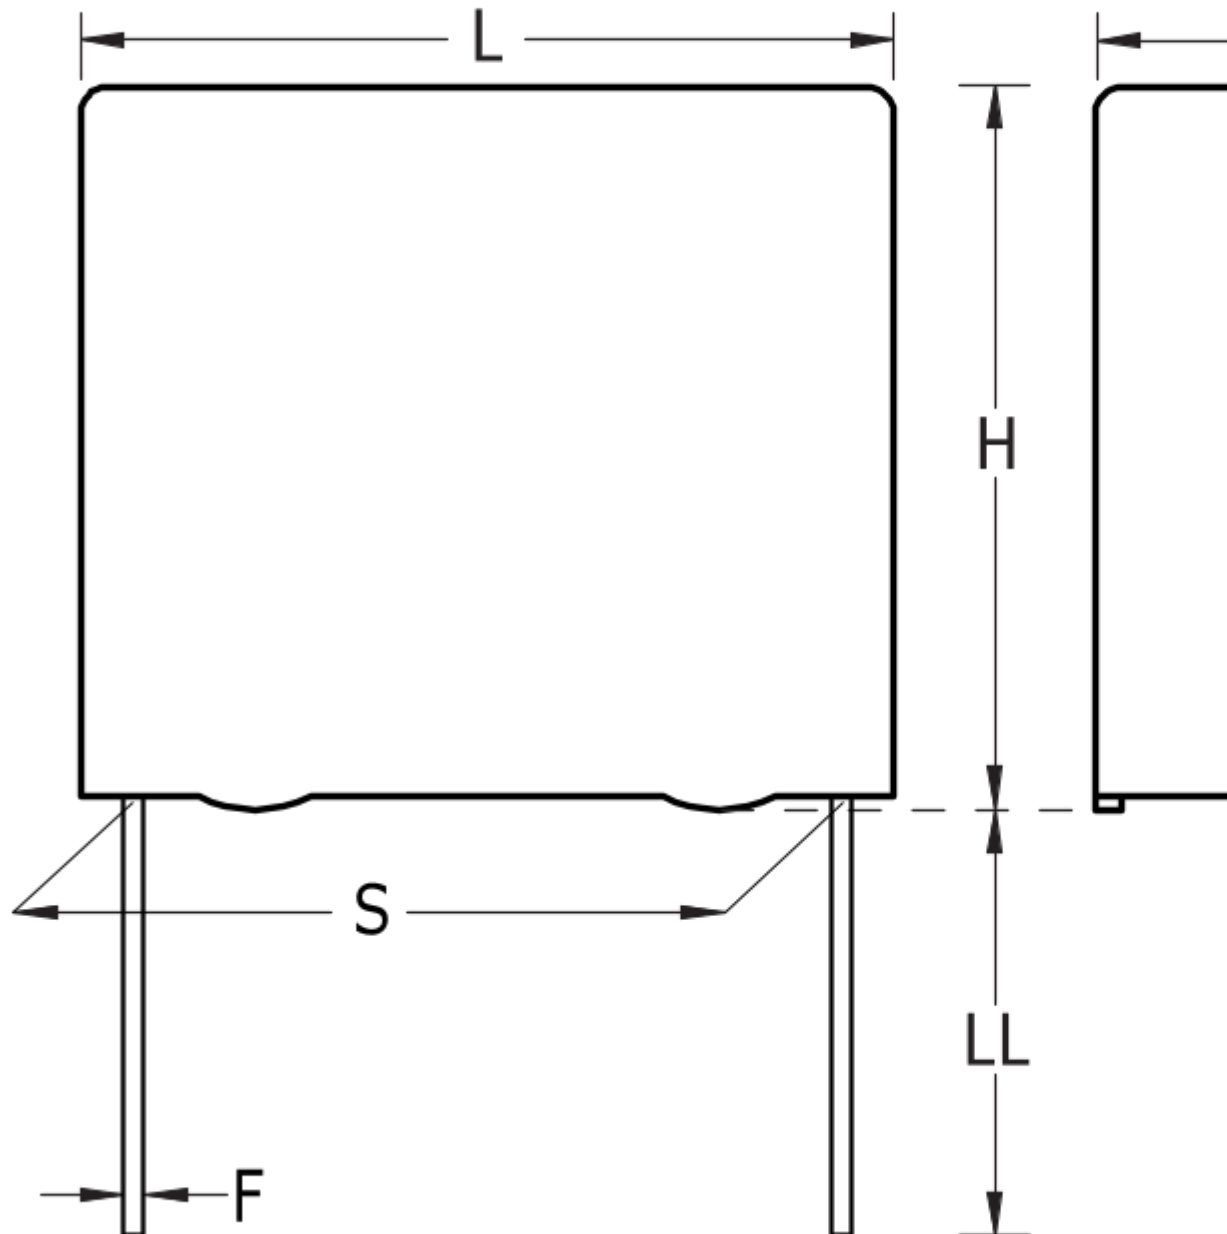

Click [here](#) for the 3D model.

Dimensions

L 10mm -0.5mm

H 9mm -0.5mm

Dimensions

T 4mm -0.5mm
S 7.5mm +/-0.4mm
LL 4mm +2mm
F 0.6mm +/-0.05mm
G 0.5mm NOM

Packaging Specifications

Packaging Bulk
Packaging Quantity 2000

General Information

Series F612
Dielectric Metallized Polyester Stacked
Style Radial
Features MKP, Pulse
RoHS Yes
Lead Cut/Short
AEC-Q200 No
Miscellaneous ClimCat: 55/105/56.

Specifications

Capacitance 0.68 uF
Capacitance Tolerance 5%
Voltage AC 40 VAC
Voltage DC 63 VDC, 47.25 VDC (105C)
Temperature Range -55/+105°C
Rated Temperature 85°C
Dissipation Factor 0.8% 1kHz, 1.5% 10kHz
Insulation Resistance 7.353 GOhms
Max dV/dt 120 V/us
Inductance 6 nH

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 5/18/2023 - a77e3845-3ddf-4b22-bdce-7f053c136551
© 2006 - 2023 KEMET
Generated 5/18/2023 - a77e3845-3ddf-4b22-bdce-7f053c136551
© 2006 - 2023 KEMET