




| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A | 53.4 |
| B | 32.5 |
| C | 1 3/4-18UNS-2A |
| D | 11 |
| E | 24.05 |
| F | 4 |
| G | 64 |
| H | 44.5 |
| I | 57 |
| K | 4.3 |

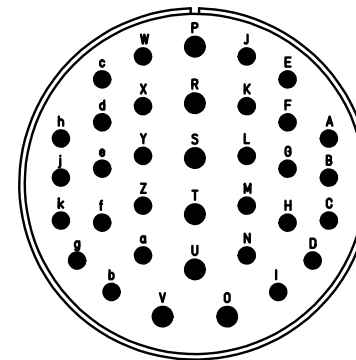

| NO. | BESCHREIBUNG / DESCRIPTION |
|-----|-------------------------------------|
| 1 | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3 | DICHTKÖRPER / GROMMET |
| 4 | ENDRING / ENDRING |
| 5 | KONTAKTSTIFT/ CONTACT PIN |
| 8 | DOSENGEHÄUSE / SHELL |
| 14 | F-ENDGEHÄUSE / F-ENDBELL |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.
 Specification and Dimensions subject to change
 Drawings illustrate normal insulator positioning

| Material Specification: | |
|-------------------------|---|
| Shell Material: | Aluminium alloy |
| Shell Plating: | Olive drab chromate over cadmium (conductive) |
| Insulator Material: | CR-Elastomere |
| Contact Material: | Copper alloy |
| Contact Plating: | Hard silver |

| | | | |
|---|---|---|--------------------------------------|
| all dimensions are in mm Dimensions without tolerance indications are general tolerances in acc. with DIN7168m | | drawing for CUSTOMER | |
|  ITT <i>Engineered for life</i> <small>ITT CANNON GmbH D - 71384 Weinstadt/Germany</small> | description CA3100F32-7P-B-F80-05 | | |
| | Box mounting receptacle (rear mount, through holes) Endbell for flex tube AWG Crimp / Pin / Layout: 32-7 | | |
| © All rights reserved. Reproduction or issue to third in any form whenever is only permitted with written authorization of ITT Cannon | |  | page 1/1 revision 2049 10. Mar 21 |