

ITEM	PART#	DESCRIPTION	QTY	UOM
A	39012046	4CKT NEW MINI FIT HOUSING 555904P210	1	PC
B	39000095	MiniFit Term Crp Male C Bs Au 16awg	4	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A2	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A3	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK
A4	--	1X16AWG DISC PVC BK UL1015 HOOKUP	BLACK

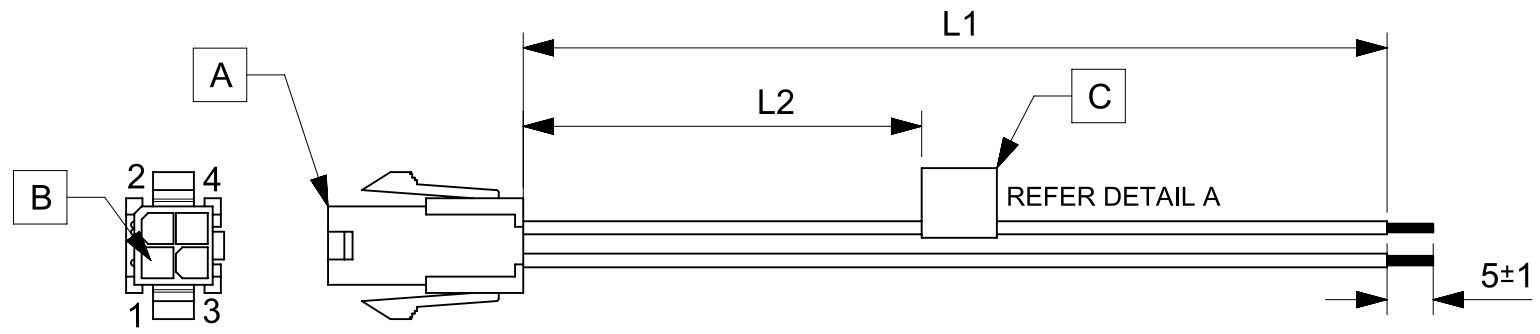


TABLE			
PART NUMBER	L1	L2	TITLE
2153282041	150±8	63 REF	MINIFIT JR DR P-S 4 CIRCUIT 150MM Au
2153282042	300±10	138 REF	MINIFIT JR DR P-S 4 CIRCUIT 300MM Au
2153282043	600±10	288 REF	MINIFIT JR DR P-S 4 CIRCUIT 600MM Au

**NOTES**

1. Connector view shown is from mating side.
2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.8mm Max.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/03/17	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		<b>molex</b>			
	DIMENSION UNITS	SCALE	EC NO: 638379					
	mm	NTS	DRWN: ARAJU 2020/03/17					
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: RDESAI01 2020/05/28					
DIVISIONAL SYMBOLS	ANGULAR TOL	± °	APPR: RDESAI01 2020/05/28		SEE TABLE			
	4 PLACES	±	INITIAL REVISION:					
	3 PLACES	±	DRWN: ARAJU 2020/03/17					
	2 PLACES	±	APPR: RDESAI01 2020/05/28					
1 PLACE	±	DOCUMENT NUMBER		2153282041				
0 PLACES	±	DOC TYPE			PSD			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	REVISION	SHEET NUMBER
			A4-SIZE	215328	SEE TABLE	GENERAL MARKET	000	1 OF 1