


# 1.9kW Single-Phase Switched PDU, LX Platform, Outlet Monitoring, 120V Outlets (24 NEMA 5-15/20R), L5-20P Plug, 0U, TAA

MODEL NUMBER: PDUMVR20NETLX

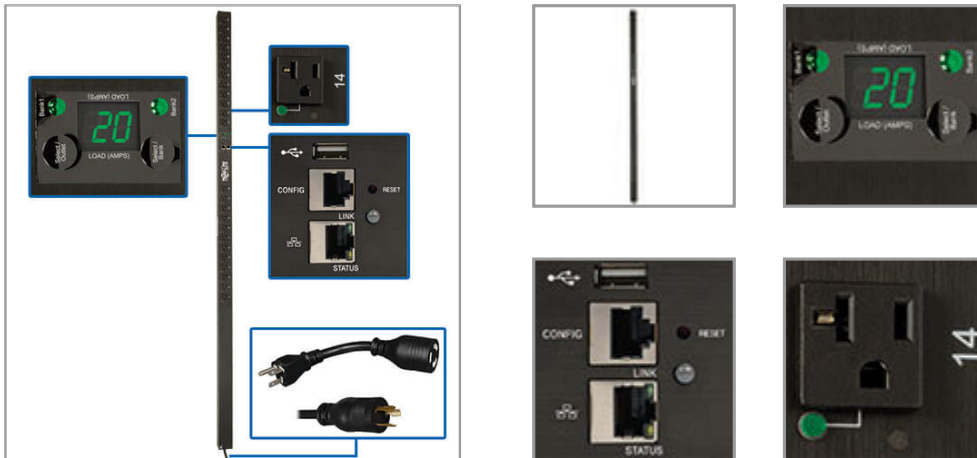

1.9kW vertical PDU with individual outlet metering distributes, monitors and manages single-phase power. Built-in Java-free network interface helps you remotely monitor load levels to prevent overloads that cause downtime.

## Description

The PDUMVR20NETLX 1.9kW Single-Phase Switched PDU with individual outlet metering provides advanced network control and remote power monitoring with the ability to turn on, turn off, reboot or lock out power to each outlet. By reducing the frequency of on-site visits, these advanced remote capabilities can save you money and reduce downtime.

The switched PDU features 24 individually controllable NEMA 5-15/20R outlets with cord retention brackets to prevent cables from becoming accidentally disconnected. A 10-foot power cord with NEMA L5-20P plug and optional 5-20P adapter connects the PDU to an AC source, generator or protected UPS.

The built-in Java-free HTML5-based LX Platform network interface enables full remote access for PDU status monitoring and email notifications via secure web browser, SNMP, telnet or SSH. It supports 10/100 Mbps auto-sensing for optimum communication with an Ethernet network. Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities. Protocols supported include IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP.

A digital ammeter allows you to monitor each load bank's current, each outlet's current and the total connected PDU load in real time to ensure they remain well below maximum capacity with no danger of overload. The switched PDU mounts in 0U of space in EIA-standard 19-inch racks using the included toolless mounting buttons or the included rack-mounting brackets.

## Highlights

- 1.9kW 120V single-phase switched 70-inch 0U PDU
- 24 controllable NEMA 5-15/20R outlets in 2 load banks
- Built-in Java-free LX Platform interface for 24/7 remote access
- Auto Probe for Autonomous Device Management
- Digital ammeter for on-site load monitoring in real time
- 10 ft. power cord with NEMA L5-20P plug and 5-20P adapter
- To enable the Auto Probe feature, this product requires LX firmware update 15.5.2 or later to be installed

## Package Includes

- PDUMVR20NETLX 1.9kW Single-Phase Switched PDU
- Built-in LX Platform interface
- NEMA 5-20P plug adapter
- Configuration cable
- Cord retention brackets
- (24) Cable ties
- Rack-mounting hardware
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual



## Features

**Distributes, Monitors and Manages Network-Grade AC Power** 1.9kW 120V 20A switched PDU with single-phase input 10 ft. power cord with NEMA L5-20P plug and 5-20P adapter Firmware upgrades support future product enhancements

**24 NEMA 5-15/20R Switched Outlets Distribute AC Power** Individual outlets can be remotely controlled to power up, power down, reboot or lock out devices Included cord retention brackets prevent cables from becoming accidentally disconnected

**Digital Ammeter** Reports current for each load bank, each individual outlet, and total PDU load Supports IP-address self-ID Digits flip 180° for easy reading at either angle

**Built-In LX Platform Interface** Allows full remote access for power monitoring with email notifications via secure web browser, SNMP, Telnet or SSH Supports 10/100 Mbps auto-sensing for communication with an Ethernet network Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities No Java required

**Broad Communications Compatibility** Supports IPv4, IPv6, HTTP, HTTPS, SMTP, SNMPv1, SNMPv2c, SNMPv3, telnet, SSH, CLI, FTP, DHCP and NTP Supports automatic and manual assignment of IP address

**Reduce Service Calls with Auto Probe Autonomous Device Management** The Auto Probe feature (Firmware 15.5.2 and greater) checks the connectivity status of any networked device and automatically takes one or more user-configured actions if the device fails to respond; actions include outlet reboot, set SNMP traps, SNMP OID sets, and even script execution when used in conjunction with the Tripp Lite PowerAlert Network Shutdown Agent (PANSA)

**Essential Safety Features** Tiered access allows administrator and guest to log in via web browser Immediate alert notifications via email or SNMP traps Supports user-specified alarm notification thresholds Real-time clock backup maintains day/date even if PDU is unpowered

**Easy 0U Installation in EIA-Standard 19 in. Racks** 70 in. PDU mounts vertically using included toolless buttons or rack-mounting brackets Included PDUMVROTATEBRKT allows mounting with rear-facing outlets

**TAA-Compliant** Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

## Specifications

OVERVIEW	
UPC Code	037332204141
PDU Type	Switched
OUTPUT	
Frequency Compatibility	50 / 60 Hz
Output Capacity Details	2.03kW (127V), 1.92kW (120V), 1.6kW (100V) / 20A total capacity (Agency de-rated to 16A); 16A max per outlet
Output Receptacles	(24) 5-15/20R
Output Nominal Voltage	100; 120; 127
Overload Protection	n/a
Customized Load Management Receptacles	Each outlet is individually controllable via remote interface
INPUT	
PDU Input Voltage	100; 120; 127
Recommended Electrical Service	20A 120V
Maximum Input Amps	20
Maximum Input Amps Details	Agency de-rated to 16A continuous



PDU Plug Type	NEMA 5-20P; NEMA L5-20P
Input Phase	Single-Phase
Input Cord Length (ft.)	10
Input Cord Length (m)	3.05
<b>USER INTERFACE, ALERTS &amp; CONTROLS</b>	
Front Panel LCD Display	Digital display reports load level in amps for LOAD BANK 1 (Outlets 1-12), LOAD BANK 2 (Outlets 13-24), LOAD BANKS 1&2 COMBINED (Outlets 1-24) and each individual output receptacle; Digital display can also be used to scroll the configured IP address
Front Panel LEDs	BANK 1 and BANK 2 LEDs verify which load bank the digital current display is reporting (Bank 1, Bank 2 or Banks 1&2 Combined); BANK 1 or BANK 2 LED will flash when the digital display is reporting output current for one of the outlets in that load bank; 24 additional LEDs, one near each output receptacle, will light continuously to verify power on/off status and flash to indicate that the digital display is reporting output current for just that individual receptacle. LX Platform Interface: Network Link/Activity Status LED (Yellow), Network Speed LED (Green); LX Platform status LED (Green)
Switches	SELECT OUTLET and SELECT BANK switches advance the LCD screen and associated LED to display power consumption for individual output receptacles and output load banks; Press and hold the SELECT BANK button for 4 seconds to rotate the digital display 90 degrees for overhead power input; Press and hold the SELECT OUTLET button for 4 seconds to scroll the configured IP address. LX Platform Interface: Recessed reset switch for interface reboot and factory reset
Current Measurement Accuracy (Amps)	+/-1%
Voltage Measurement Accuracy (Volts)	+/-1%
Power Measurement Accuracy (Watts)	+/-1%
<b>PHYSICAL</b>	
Form Factors Supported	0U vertical rackmount; includes rackmount brackets. Supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / cm)	192.48 x 15.49 x 11.51
Shipping Dimensions (hwd / in.)	75.78 x 6.10 x 4.53
Shipping Weight (kg)	6.77
Shipping Weight (lbs.)	14.93
Unit Dimensions (hwd / cm)	178 x 5.6 x 5.2
Unit Dimensions (hwd / in.)	70 x 2.2 x 2.04
Unit Weight (kg)	4.35
Unit Weight (lbs.)	9.6
<b>ENVIRONMENTAL</b>	
Storage Temperature Range	5 to 140F (-15 to 60C)
Relative Humidity	5 to 95% non-condensing
Operating Elevation (ft.)	0-10,000
Operating Elevation (m)	0-3000



<b>COMMUNICATIONS</b>	
Network Monitoring Port	RJ45 Network port, RJ45 Config/Console Access port; USB A port supports a variety of EnviroSense2 environmental and control modules. See Accessories>Management Hardware section for more information about these modules.
SNMP Compatibility	Pre-installed LX platform interface provides remote monitoring via Java-free HTML5 web interface, telnet, SSH and SNMP management systems
<b>CERTIFICATIONS</b>	
Certifications	Tested to UL60950-1: 2007 R12.11 (USA), CAN/CSA-C22.2 NO. 60950-1-07+A1: 2011(Canada), FCC CLASS A PART 15 (Emissions), NOM (Mexico), RoHS compliant, TAA Compliant
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2019 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>