


REV	MODIFICATION	UPDATE DATE	SIGNATURE

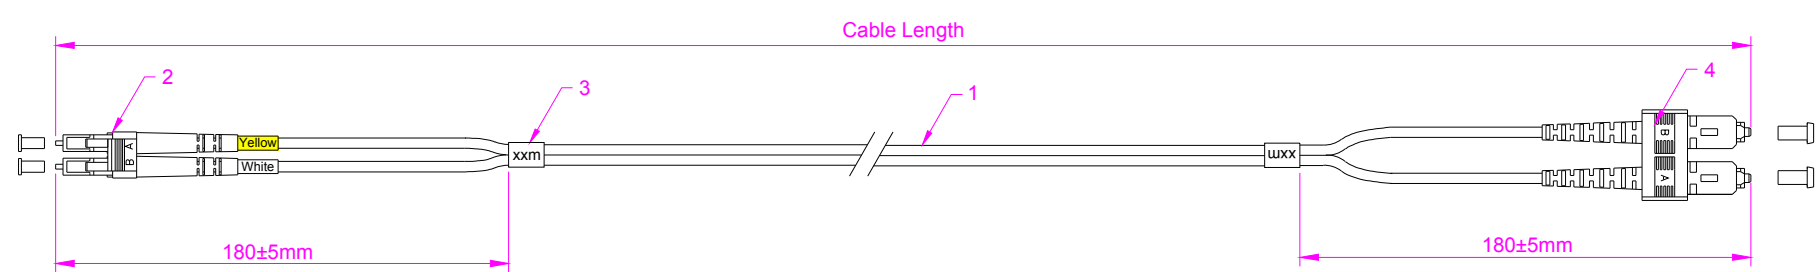


Technical requirements:

1. Performance requirements:

Insertion loss: IL≤0.2dB
Return loss: RL≥35dB

- 2. Fiber optic connectors meet IEC 61754, YDT1272 standards
- 3. Optical fiber cable in line with IEC60793-1, IEC 60794 standards
- 4. Fiber optic jumper complies with IEC 61300, GR-326, TIA/EIA568-B standards
- 5. A-B/B-A

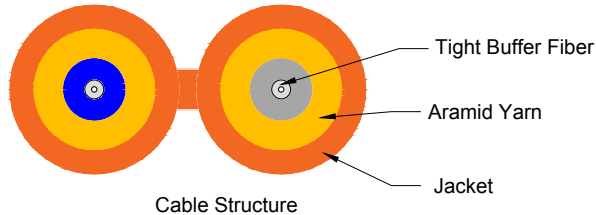

Cable Length	Tolerance
Cable Length<1M	5cm
1M≤Cable Length<15M	10cm
15M≤Cable Length<30M	15cm
Cable Length≥30M	Cable Length*1%

Requirements Of Cable					
Cable Type				Fiber Type	OM2
Cable Diameter	2.0mm	Attenuation	@850nm <3.5dB/km		
Cable Material	PVC		@1300nm <1.5dB/km		
Tensile Strength	Long Term	60 N	Crush Resistance	Long Term	100 N/100mm
	Short Term	100 N		Short Term	500 N/100mm
Bending Radius	Static	30 D	Temperature Range	Storage Temperature -20 ~ +60	
	Dynamic	50D		Operating Temperature -20 ~ +60	

ITEM	QTY	P/N	SPECIFICATIONS		
4	1		SC/UPC MM 2.0mm Duplex Connector(Beige Housing Beige Boot+Clip)		
3	2		Cable Label		
2	1		LC/UPC MM 2.0mm Duplex Connector(Beige Housing White Boot)		
1	A/R		OD: 2.0mm, Multimode 50/125 OM2 , Duplex, Fiber Optic Cable, Color: Orange, PVC		

	DRAW	Taylor Scott	DATE	18-08-2021	TITLE: Fiber Optic Patch Cord LC/UPC-SC/UPC Duplex 2.0mm OM2 Multimode				
	CHECK	<i>Lihuanhuan</i>	APPROVED		CUSTOMER NO		DWG NO	FJ5LCSC-XXM	REV