


CDBJSC8650-G

Reverse Voltage: 650 V

Forward Current: 8 A



RoHS Device



Features

- Rated to 650V at 8 Amps
- Short recovery time.
- High speed switching possible.
- High frequency operation.
- High temperature operation.
- Temperature independent switching behaviour.
- Positive temperature coefficient on VF.

Circuit diagram

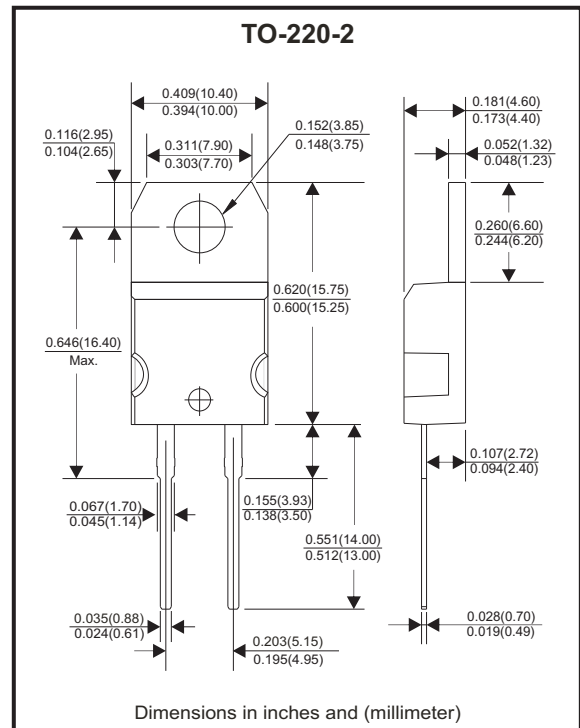

Maximum Rating (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Value	Unit
Repetitive peak reverse voltage		V _{RRM}	650	V
Surge peak reverse voltage		V _{RSM}	650	V
DC blocking voltage		V _{DC}	650	V
Typical continuous forward current	T _C = 150°C	I _F	8	A
Repetitive peak forward surge current	T _C = 25°C, t _p = 10ms Half sine wave, D = 0.3	I _{FRM}	40	A
Non-repetitive peak forward surge current	T _C = 25°C, t _p = 10ms Half sine wave	I _{FSM}	80	A
Power dissipation	T _C = 25°C	P _{TOT}	102.4	W
	T _C = 110°C		45	
Typical thermal resistance	Junction to case	R _{θJC}	1.465	°C/W
Operating junction temperature range		T _J	-55 ~ +175	°C
Storage temperature range		T _{STG}	-55 ~ +175	°C

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Typ	Max	Unit
Forward voltage	IF = 8 A, TJ = 25°C	VF	1.47	1.7	V
	IF = 8 A, TJ = 175°C		1.78		
Reverse current	VR = 650V, TJ = 25°C	IR	10	100	μA
	VR = 650V, TJ = 175°C		15		
Total capacitive charge	VR = 400V, TJ = 150°C QC = ∫ ₀ ^{VR} C(V) dv	QC	30		nC
Total capacitance	VR = 0V, TJ = 25°C, f = 1 MHz	C	560		pF
	VR = 200V, TJ = 25°C, f = 1 MHz		56.5		
	VR = 400V, TJ = 25°C, f = 1 MHz		54		

Typical Characteristics (CDBJSC8650-G)

Fig.1 - Forward Characteristics

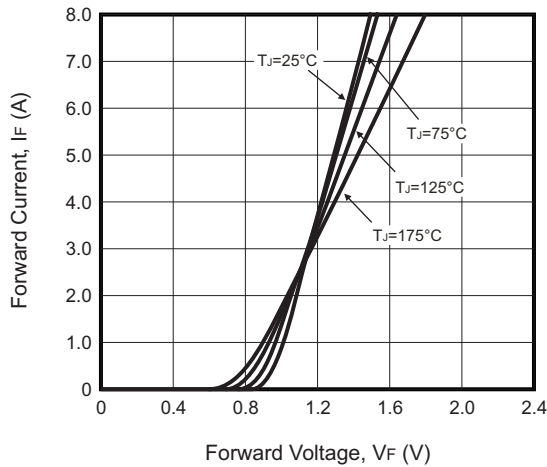


Fig.2 - Reverse Characteristics

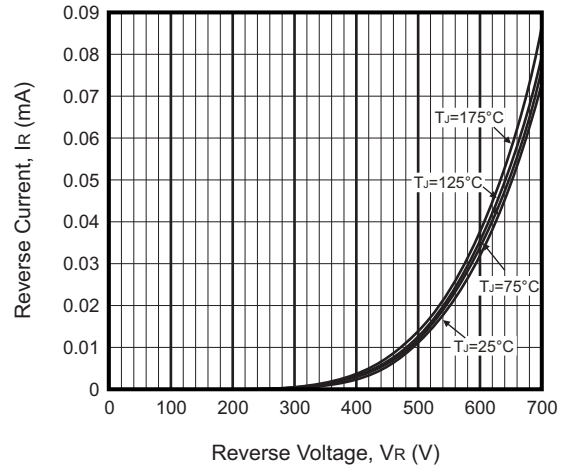


Fig.3 - Current Derating


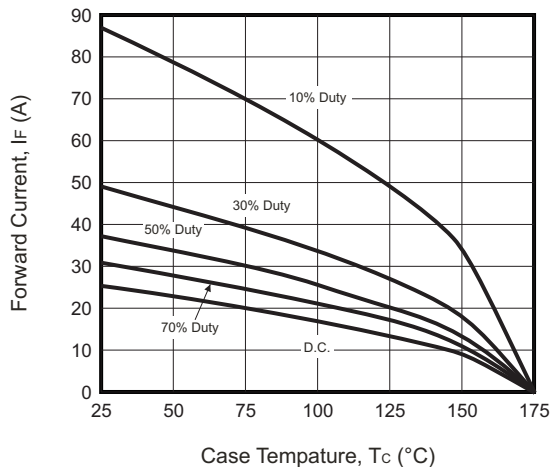



Fig.4 - Capacitance vs. Reverse Voltage

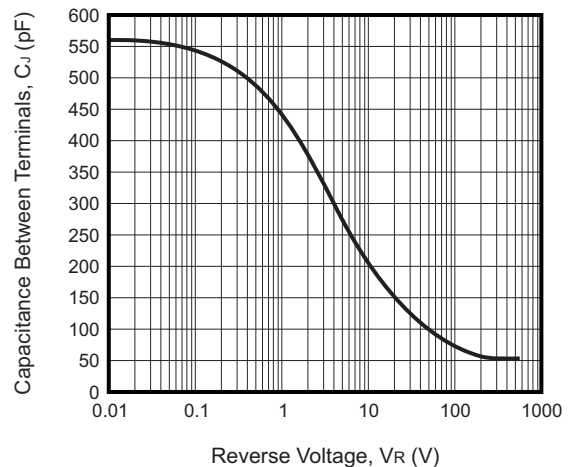

Company reserves the right to improve product design, functions and reliability without notice.

Marking Code

Part Number	Marking Code
CDBJSC8650-G	JSC8650

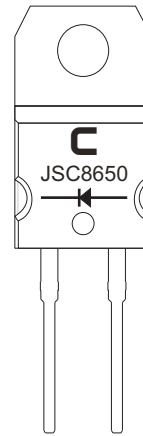

Standard Packaging

Case Type	TUBE PACK	
	TUBE (pcs)	BOX (pcs)
TO-220-2Pin	50	1,000