


1347.2

BKA 2,5/16 e.B. BG

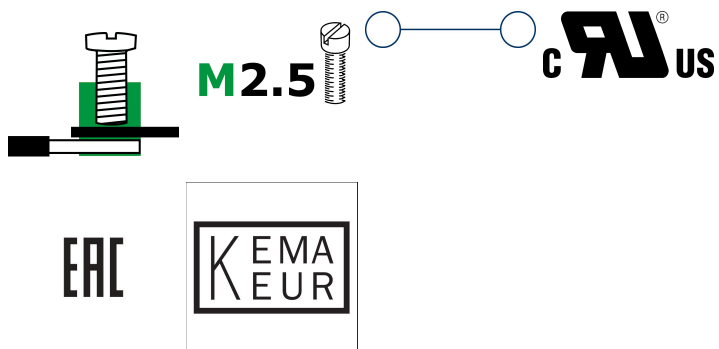

Feed-through terminal for direct mount, Screw connection, Mounting type: Mounting surface, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Beige

## Business data

Packaging unit	20
Quantity unit	PC
Weight per piece (not including packaging)	58.4 g
Weight per piece (including packaging)	61.6 g
Unit of weight	G
Customs number	85369010
Country of origin	DE
Product description	Feed-through terminal for direct mount

1347.2

BKA 2,5/16 e.B. BG

---

## Technical data

---

### Dimensions

---

Length	95.8 mm
Height	23 mm
Hole spacing (mid-point to mid-point)	88.7 mm
Pitch	5 mm

---

### Ratings

---

Rated voltage	400 V
Rated current	24 A
Rated cross-section	2.5 mm <sup>2</sup>
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3
Maximum power dissipation for nominal condition	0.77 W

---

1347.2

BKA 2,5/16 e.B. BG

## Technical data

### Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	32
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	12
Stripping length	7 mm
Screw head	Slotted
Screw threading	M 2,5
Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.8 Nm

### Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

### Further technical data

Mounting type	Mounting face
Gauge plug acc. to EN 60 947-1	A3
End plate required	✓

### Print

Colour	Beige
--------	-------

# Data sheet



1347.2

BKA 2,5/16 e.B. BG

---

## Technical data

---

### Environmental Product Compliance

---

REACH Conform	yes
REACH Reference date	2021-07-08
REACH Candidate Substance Note	No
RoHS Conform	yes

---

1347.2

BKA 2,5/16 e.B. BG

## Approvals

### Standards and regulations

EAC approval	TR ZU 004/2011
EAC approval granted	yes

### cUL Recognized

cUL approval	C22.2 No 158
cUL Usegroup B: rated voltage	300 V
cUL Usegroup B: rated current	20 A
cUL Usegroup C: rated voltage	300 V
cUL Usegroup C: rated current	20 A
cUL wire cross-section single-core (rigid) AWG, min.	22
cUL wire cross-section single-core (rigid) AWG, max.	12
cUL wire cross-section stranded AWG, min.	22
cUL wire cross-section stranded AWG, max.	12
cUL torque	5.3 Nm
cUL wire material	Cu
cUL Recognized	yes

### KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1:2009
KEMA KEUR approval granted	yes
KEMA rated voltage	400 V
KEMA rated current	24 A
KEMA rated impulse voltage	6 kV
KEMA wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
KEMA wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
KEMA wire cross-section stranded, min.	0.2 mm <sup>2</sup>
KEMA wire cross-section stranded, max.	4 mm <sup>2</sup>
KEMA torque, min.	0.4 Nm
KEMA torque, max.	0.8 Nm

1347.2

BKA 2,5/16 e.B. BG

---

## Approvals

---

### UL Recognized

---


UL approval	UL 1059
UL Usegroup B: rated voltage	300 V
UL Usegroup B: rated current	20 A
UL Usegroup C: rated voltage	300 V
UL Usegroup C: rated current	20 A
UL wire cross-section single-core (rigid) AWG, min.	22
UL wire cross-section single-core (rigid) AWG, max.	12
UL wire cross-section stranded AWG, min.	22
UL wire cross-section stranded AWG, max.	12
UL torque	5.3 Lb In
UL wire material	Cu
UL factory wiring	yes
UL field wiring	yes
UL Recognized	yes

---


---

Media

---

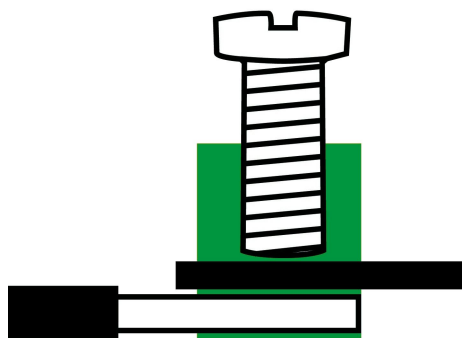

**M2.5**



**CRA<sup>®</sup> US**

**EAC**



# Data sheet

1347.2

BKA 2,5/16 e.B. BG



---

## Accessories

---



1347.2

BKA 2,5/16 e.B. BG


## Insulated external cross-connector



External insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 50.1 mm, Rated current: 27 A; Colour: Yellow

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2045.0	AQI 10/5/11 YE	4044211048501	10 ST



External insulated cross-connector, No. of poles: 3, Mounting type: Plug in, Width: 14.36 mm, Rated current: 27 A; Colour: Yellow

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2033.0	AQI 3/5/11 YE	4044211048358	50 ST



External insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 9.26 mm, Rated current: 27 A; Colour: Yellow

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
2032.0	AQI 2/5/11 YE	4044211048341	50 ST


1347.2

BKA 2,5/16 e.B. BG

---

## Insulated external cross-connector

---



External insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 19.46 mm, Rated current: 27 A; Colour: Yellow

---

### General order data


Product number:	Article name	GTIN (EAN)	Packaging unit
2044.0	AQI 4/5/11 YE	4044211048495	50 ST

---

---

## Quick marking

---



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

---

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
4600.7	PMC SB 5/50 WH	4044211088903	500 ST

---

1347.2

BKA 2,5/16 e.B. BG

## Screwdriver



Screwdriver with bare blade, Colour: Black-grey

### General order data

Product number:	Article name	GTIN (EAN)	Packaging unit
1085.0	SDB 0,5x3,0	4044211014643	1 ST